



* 所有圖片僅供試。

UHD 顯示器 UL3J-B

LG webOS UHD 顯示器



Ultra HD 超高解析度
帶來卓越的影像畫質



優雅的
窄邊框設計



搭載webOS 6.0
的高效能表現



支援各種
感應器連接



與 **LG One:Quick Share**
相容



與AV 控制系統
相容

UL3J-B

尺寸	86" / 75" / 65"
螢幕解析度	3,840 × 2,160 (UHD)
建議運作時長	16 Hours / 7 Days
亮度	86" : 330 nits 75" : 330 nits 65" : 400 nits
相容的LG解決方案	LG One:Quick Share, LG ConnectedCare, LG SuperSign CMS/Control



Ultra HD 超高解析度帶來的卓越影像

憑藉超高清的分辨率，使內容的色彩和細節生動逼真。此外，IPS面板有寬廣的視角，可提供清晰的內容。



精緻的纖薄設計

此系列的邊框尺寸和厚度*都很薄，可節省空間並易於安裝。此外，它還增加了螢幕的沉浸式體驗，並提供了精緻的設計，改善了產品安裝空間的裝飾。

* 與LG UL3G 系列相比



搭載LG webOS 6.0的高效能

LG webOS 6.0 在 SoC* 和 Web 引擎方面進行了升級，適用於 UL3J 系列，可順利執行多項任務。LG webOS 智慧看板平台透過直覺的 GUI **增強用戶便利性。

* SoC: 單晶片系統
** GUI: 圖形使用者介面



可搭配各種感應器應用

LG webOS 智慧看板平台支援透過 USB 外掛程式與外部感測器** (例如 GPIO、NFC/RFID、溫度感測器等) 進行簡單連接，有助於輕鬆提供增值解決方案*。

* 例如根據天氣變化，提供店內訪客特定的促銷資訊
** 外接感應器需要另行購買並測試與 webOS 平台的相容性。



與 AV 控制系統相容

UL3J 系列已支援 CrestronConnected®* 認證，與專業 AV 控制器的相容性更高，可進行完美的整合和自動化控制**，提升業務管理效率。

* Crestron Connected® 相容性需從顯示螢幕進行初始設定。
** 網路控制



LG 的無線螢幕共享解決方案

LG One:Quick Share

LG One:Quick Share 是一種無線螢幕共享解決方案，可透過 UL3J 系列、USB 傳輸單元及其應用程式使用。您可以透過 USB 加密工具按鈕和嵌入式 Wi-Fi*，將個人 PC 螢幕輕鬆共享到顯示螢幕，且無需使用遙控器即可調整連接顯示螢幕的基本設定值（音量、影像模式、自動亮度等）。此外，辦公會議模式**可幫助您在會議開始前顯示議程、注意事項。

*使用者需要在顯示器的網路菜單中設定啟用 Soft AP。

**使用者可以在顯示器的 EZ 設定菜單中啟用辦公會議模式。

*** LG One:Quick Share 需要另行購買。



遠端監控

此網路式監控解決方案，方便使用者輕鬆使用。讓使用者隨時隨地在可使用網路的環境下，從手機和 PC 完整存取，且可存取目前和之前的資料。讓使用者可即時遠端監控組件、進行調整和控制組件。



與視訊會議系統相容

為了進行有效的視訊會議，UL3J 系列支援與 Cisco 解決方案的相容性，為更智慧的視訊會議提供強大的整合控制功能*。

* 使用 HDMI 纜線連接（HDMI 纜線為選購項目）



輕鬆內容發布和軟體更新

UL3J 系列內建嵌入式 Wi-Fi，可輕鬆在同一網路下無線發布內容和更新軟體。



無線存取點

UL3J 系列可作為虛擬路由器使用，可以是行動裝置的無線存取點。



內建喇叭

內容將透過內建喇叭的音效而更豐富，無需購買或安裝外接喇叭。



即時 LG ConnectedCare 服務


使用 LG 服務提供的可選雲端服務解決方案 LG ConnectedCare*，可更輕鬆且更快速進行維護。遠端管理客戶工作場所顯示螢幕的狀態，以進行故障診斷和遠端控制服務，支援客戶業務的穩定進行。

* LG ConnectedCare 服務的可用性因地區而異，需另行購買。因此，請聯絡所在地區的 LG 銷售代表，了解更多詳細資訊。


連接埠

86"

後方

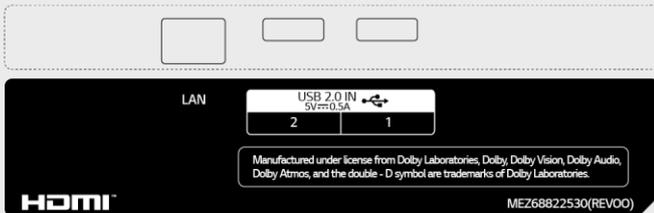


側邊

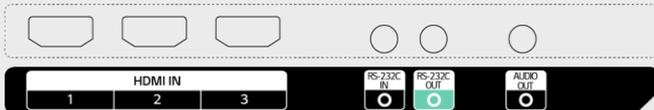


75" / 65"

後方

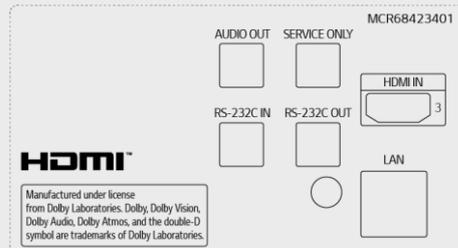

側邊

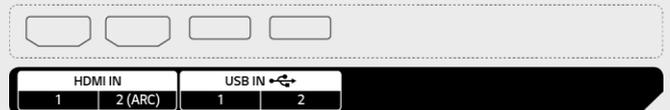

	86UL3J-B	75UL3J-B	65UL3J-B	
Panel	Screen Size	86"	75"	65"
	Panel Technology	IPS	IPS	IPS
	Back Light Type	Direct	Direct	Direct
	Aspect Ratio	16 : 9	16 : 9	16 : 9
	Native Resolution	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)
	Refresh Rate	120 Hz	60 Hz	60 Hz
	Brightness	330 nit (Typ.)	330 nit (Typ.)	400 nit (Typ.)
	Contrast Ratio	1,200 : 1	1,200 : 1	1,200 : 1
	Dynamic CR	1,000,000 : 1	1,000,000 : 1	1,000,000 : 1
	Color Gamut	DCI 80%	DCI 80%	DCI 80%
	Viewing Angle (H × V)	178 × 178	178 × 178	178 × 178
	Color Depth	1.07 Billion Colors, (Advanced 8 bit + FRC)	1.07 Billion Colors (8 bit + FRC)	1.07 Billion Colors (8 bit + FRC)
	Response Time	8 ms (G to G)	8 ms (G to G)	8 ms (G to G)
	Surface Treatment (Haze)	3%	1%	1%
	Lifetime	30,000 Hrs (Min.)	30,000 Hrs (Min.)	30,000 Hrs (Min.)
	Operation Hours (Hours/Day)	16 / 7	16 / 7	16 / 7
Portrait / Landscape	Yes / Yes	Yes / Yes	Yes / Yes	
Connectivity	Input	HDMI (3, HDCP 2.2/1.4), RS-232C IN (4pin Phone-jack (86")), RJ45 (LAN (86")), IR IN (86"), USB 2.0 (2, Type A)		
	Output	Audio Out, RS-232C OUT (4pin Phone-jack (86")),		
Mechanical Specification	Bezel Color	Ashed Blue	Ashed Blue	Ashed Blue
	Bezel Width	Off : 6.9 mm (T/R/L), 18.4 mm (B) On : 15.9 mm (T/R/L), 19.9 mm (B)	Off : 7.9 mm (T/R/L), 18.4 mm (B) On : 13.9 mm (T/R/L), 19.9 mm (B)	Off : 6.8 mm (T/R/L), 18.4 mm (B) On : 12.8 mm (T/R/L), 19.9 mm (B)
	Weight (Head)	45.2 kg	31.4 kg	21.5 kg
	Packed Weight	57.7 kg	40.3 kg	27.5 kg
	Monitor Dimension (W × H × D)	1,927 × 1,104 × 59.9 mm	1,678 × 964 × 59.9 mm	1,454 × 838 × 57.7 mm
	Carton Dimensions (W × H × D) (Box Outer Size)	2,115 × 1,215 × 228 mm	1,820 × 1,115 × 200 mm	1,600 × 970 × 172 mm
	VESA™ Standard Mount Interface	600 × 400 mm	400 × 400 mm	300 × 300 mm
Key Feature	Internal Memory 16 GB (86"), Internal Memory 8 GB (75" /65"), Built-in Wi-Fi, Sensor (Temperature Sensor, Auto Brightness Sensor), Local Key Operation (Power On/Off Only), webOS 6.0, Embedded CMS (Local Contents Scheduling, Group Manager), USB Plug & Play, Fail Over, Background Image (Booting Logo Image, No Signal Image), Sync Mode (RS-232C Sync, Local Network Sync), Screen Share, Video Tag (4, Max One HDMI Input), Play via URL, Rotation (Screen Rotation, External Input Rotation), Gapless Playback, Setting Data Cloning, SNMP, ISM (Image Sticking Minimization) Method, Auto Set ID, Status Mailing, Control Manager, 3 rd Party Compatibility (Cisco Certi. (TBD, Oct~ (75" /65")), Crestron Connected, Power (Smart Energy Saving, PM Mode, Wake on LAN, Network Ready), Beacon, HDMI-CEC ¹⁾ , SI Sever Setting, webRTC, Pro:Idiom			
Environment Conditions	Operation Temperature	0°C to 40°C (Portrait Scene : 0°C to 30°C)	0°C to 40°C (Portrait Scene : 0°C to 35°C)	0°C to 40°C (Portrait Scene : 0°C to 35°C)
	Operation Humidity	10% to 80%	10% to 80%	10% to 80%
Power	Power Supply	AC 100-240 V ~, 50/60 Hz	AC 100-240 V ~, 50/60 Hz	AC 100-240 V ~, 50/60 Hz
	Power Type	Built-in Power	Built-in Power	Built-in Power
Power Consumption	Typ. / Max.	220 W / 300 W	155 W / 220 W	130 W / 187 W
	BTU (British Thermal Unit)	751 BTU/Hr (Typ.), 1,024 BTU/Hr (Max.)	529 BTU/Hr (Typ.), 751 BTU/Hr (Max.)	444 BTU/Hr (Typ.), 638 BTU/Hr (Max.)
	Smart Energy Saving	154 W	108.5 W	91 W
	DPM	0.5 W	0.5 W	0.5 W
	Power Off	0.5 W	0.5 W	0.5 W
Sound	Speaker	Yes	Yes	Yes
Certification	Safety	CB	CB	CB
	EMC	FCC Class "A" / CE	FCC Class "A" / CE	FCC Class "A" / CE
	ErP / Energy Star	Yes (OldErP for Jordan) / No	Yes (OldErP for Jordan) / Yes	Yes (OldErP for Jordan) / Yes
Software Compatibility	SuperSign CMS, SuperSign Control / Control+, SuperSign WB, SuperSign Media Editor, LG ConnectedCare ²⁾			
Language	English, French, German, Spanish, Italian, Korean, Chinese (Simplified), Chinese (Original), Portugues (Brazil), Swedish, Finnish, Norwegian, Danish, Russian, Japanese, Portugues (Europe), Dutch, Czech, Greek, Turkiye, Arabic, Polski			
Accessory	Basic	Remote Controller, Power Cord, Regulation Book, Phone to D-Sub9 Gender, Cable Holder		

¹⁾ Compatibility may differ by equipment.

²⁾ The availability can differ by region.

* 規格如有更改，恕不另行通知。請務必查看產品手冊以了解有關產品使用的詳細資訊。



Download
LG C-Display+
Mobile App
Google Play Store



TEL: 0800-800-945 FAX: 02-8935-2108

E-mail: service@truesun.com.tw

總公司: 新北市淡水區民權路187巷12號23樓
台北辦公室: 台北市中山區龍江路415巷48號

LG may make changes to specifications and product descriptions without notice.

Copyright © 2024 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. The names of products and brands mentioned here may be the trademarks of their respective owners.



LG Business Solutions