



*圖片僅供參考

UHD 顯示器 UH5J-H

防眩光 UHD 標準顯示器



適當的顯示亮度



webOS 智慧平台




行動內容管理



會議室解決方案

UH5J-H


螢幕尺寸	98" / 86" / 75" / 65" / 55" / 49" / 43"
解析度	3,840 × 2,160 (UHD)
邊框顏色	Black
亮度	500 nit (Typ.)
邊框	98" / 75" : 14.9 mm (Even bezel) 86" : 14.3 mm (Even bezel) 65" / 55" / 49" : 9.9 mm (T/R/L), 14.4 mm (B) 43" : 8.4 mm (T/R/L), 14.4 mm (B)
深度	98" : 86.1 mm 86" : 60.6 mm 75" : 57.9 mm 65" / 55" / 49" / 43" : 39.9 mm

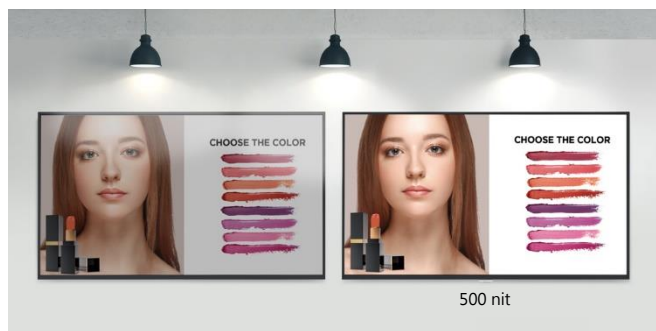

適當的顯示亮度

UH5J-H 系列採用室內顯示建議亮度 500 cd/m²，可清晰呈現內容並且吸引眾人的眼光，是最適合會議室、機場、零售店、商場等場所的行銷顯示螢幕。

* 提供的實際圖像可能會與顯示的範例圖像不同。

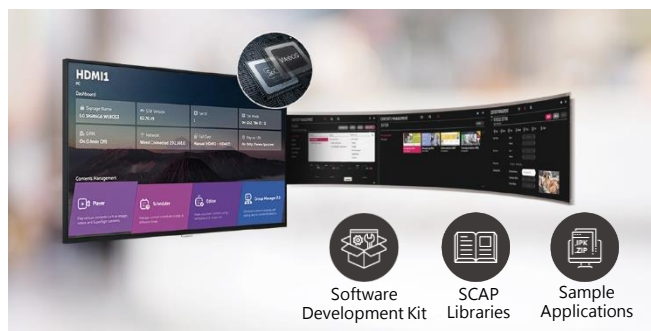

具有 webOS 的高性能


LG webOS 平台採用直覺性的 GUI 和簡易的應用程式開發工具，以提升使用者的便利性。



數形塗層

UH5J-H 系列在許多場所都無法避免暴露到灰塵、濕氣等環境因素，這些環境因素長時間下來可能會影響到性能。電源板上的數形塗層可保護 UH5J-H 系列不受鹽分、灰塵、鐵粉、濕氣等影響，進而降低這些風險。

*提供的實際圖像（顯示器顯示螢幕）可能會與顯示的範例圖像不同。

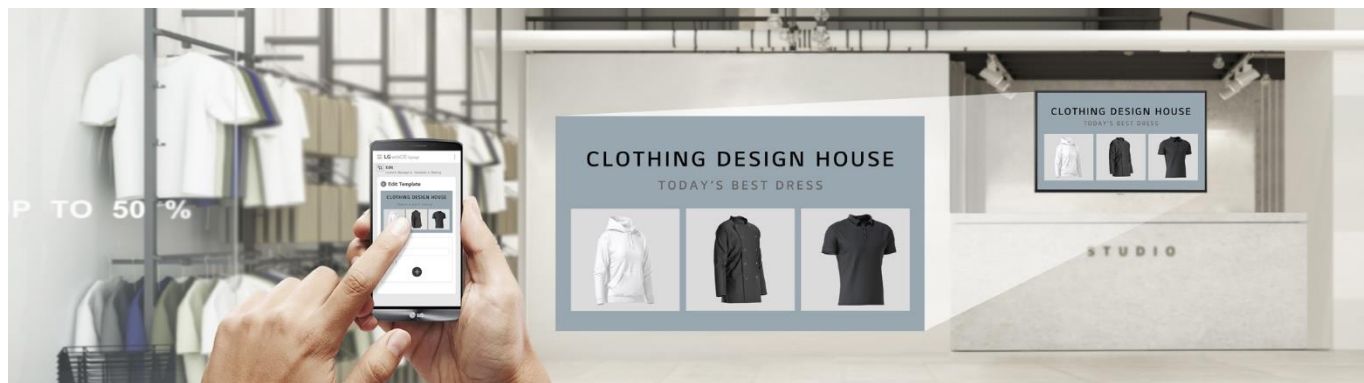


行動內容管理

您可用 Promota* 應用程式創立門市資料並取得模板建議。使用者可根據需求客製模板，並且輕鬆在電腦和行動裝置上建立並管理內容。

* LG Promota 可從 App Store 和 Google Play 商店下載。（不適用歐洲 / CIS 地區）

* 本應用程式在韓國的名稱是 Mustard，而不是 Promota。

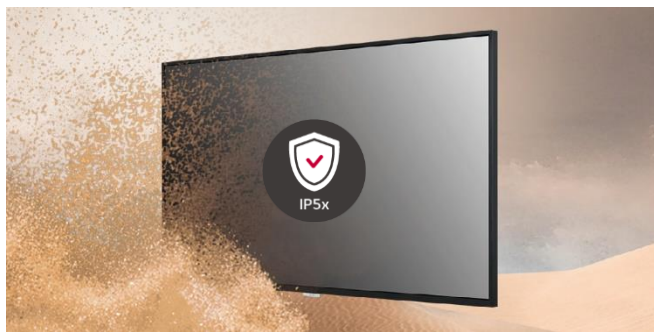

IP5x 認證設計

IP5x 防塵認證確保產品可防塵，減少效能降低的風險。



與 AV 控制系統相容


UH5J-H 系列已支援 CrestronConnected® 認證，與專業 AV 控制器的相容性更高，可進行完美的整合和自動化控制*，提升業務管理效率。

*基於網路的控制


連接埠

98"

Side



Bottom




86" / 75"


Side



Bottom



65" / 55" / 49" / 43"

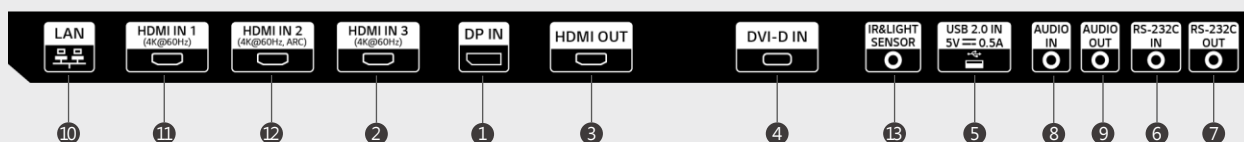

① DP IN

② HDMI IN 3

③ HDMI OUT

④ DVI-D IN

⑤ USB 2.0 IN

⑥ RS-232C IN

⑦ RS-232C OUT

⑧ AUDIO IN

⑨ AUDIO OUT

⑩ LAN

⑪ HDMI IN 1


⑫ HDMI IN 2

⑬ IR&LIGHT SENSOR


* 插孔面板可能與上圖不同，請在訂購前聯絡 LG 銷售團隊進行核實。

尺寸大小 (unit: mm)


98"

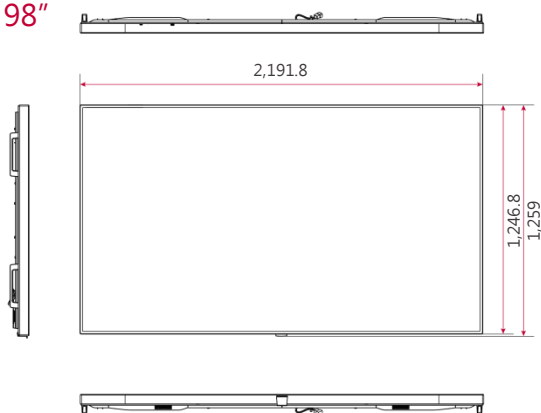


73.7

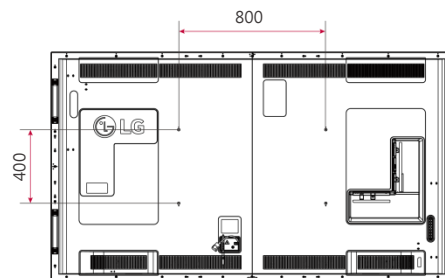


86"

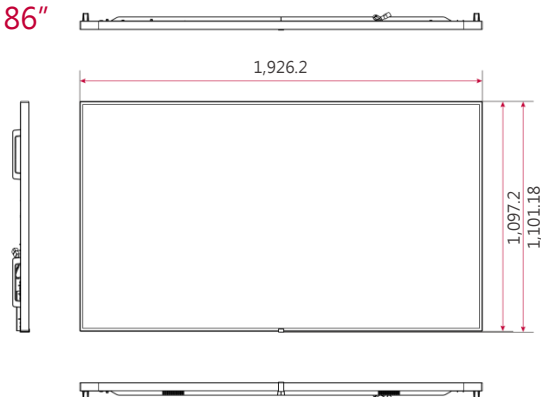


40.8

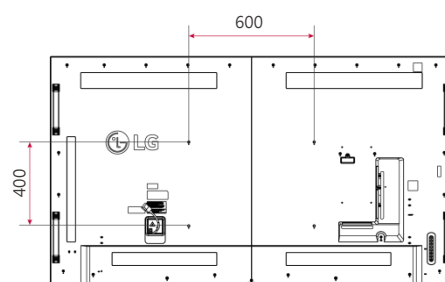

75"

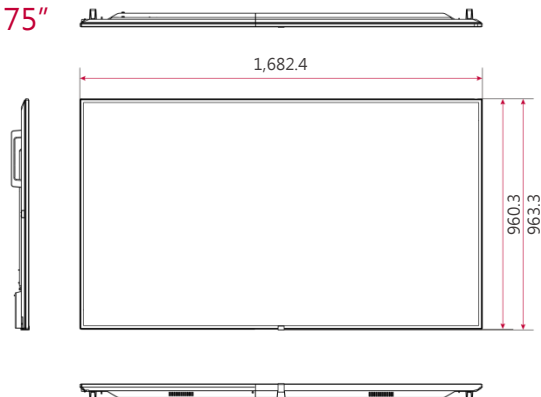



31.9

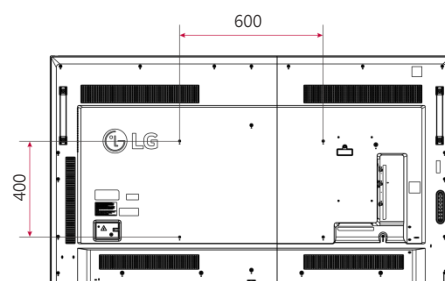



* 尺寸大小可能與上圖不同，請在訂購前聯絡 LG 銷售團隊進行核實。

尺寸大小 (unit: mm)



65"

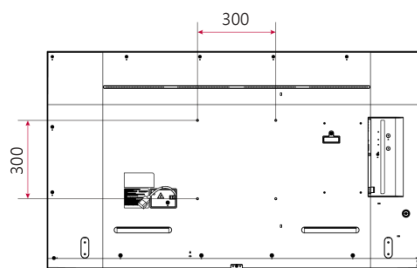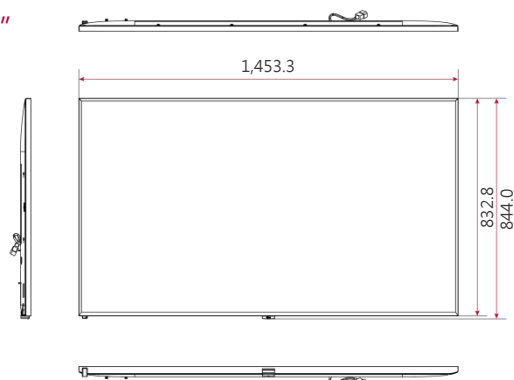



55"

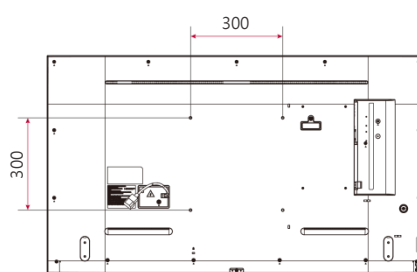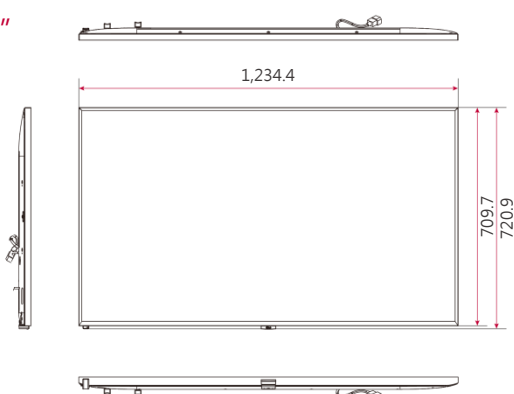

49"

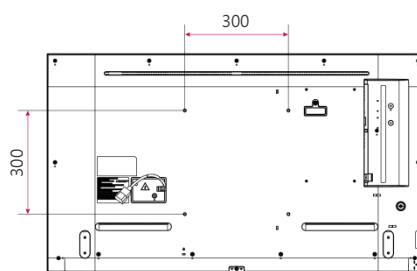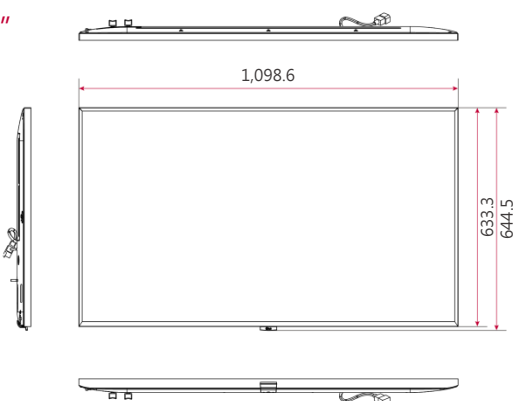

43"

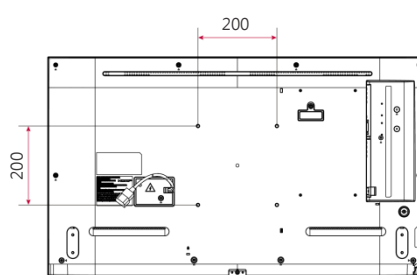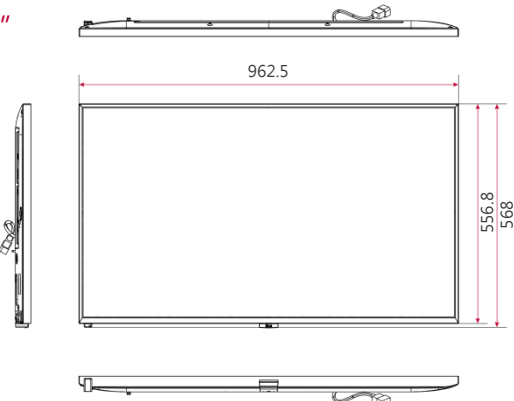

* 尺寸大小可能與上圖不同，請在訂購前聯絡 LG 銷售團隊進行核實。

		98UH5J-H	86UH5J-H	75UH5J-H	65UH5J-H	55UH5J-H	49UH5J-H	43UH5J-H
面板	螢幕尺寸	98"	86"	75"	65"	55"	49"	43"
	面板技術	IPS	IPS	IPS	IPS	IPS	IPS	IPS
	背光技術	Direct	Edge	Edge	Edge	Edge	Edge	Edge
	寬高比	16 : 9	16 : 9	16 : 9	16 : 9	16 : 9	16 : 9	16 : 9
	解析度	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)	3,840 × 2,160 (UHD)
	更新率	60 Hz	120 Hz	120 Hz	60 Hz	60 Hz	60 Hz	60 Hz
	亮度	500 nit (Typ.)	500 nit (Typ.)	500 nit (Typ.)	500 nit (Typ.)	500 nit (Typ.)	500 nit (Typ.)	500 nit (Typ.)
	對比度	1,200 : 1	1,100 : 1	1,100 : 1	1,100 : 1	1,100 : 1	1,100 : 1	1,200 : 1
	Dynamic CR ¹⁾	1,000,000 : 1	1,000,000 : 1	1,000,000 : 1	1,000,000 : 1	1,000,000 : 1	1,000,000 : 1	1,000,000 : 1
	色域	NTSC 72%	NTSC 72%	NTSC 72%	BT709 95%	BT709 95%	BT709 95%	BT709 95%
	可視角度 (水平 × 垂直)	178 × 178	178 × 178	178 × 178	178 × 178	178 × 178	178 × 178	178 × 178
	色深	1.07 Billion Colors (10 bit)	1.07 Billion Colors (10 bit (D))	1.07 Billion Colors (10 bit (D))	1.07 Billion Colors (10 bit (D))	1.07 Billion Colors (10 bit (D))	1.07 Billion Colors (10 bit (D))	1.07 Billion Colors (8 bit + FRC)
	反應速度	8 ms (G to G)	8 ms (G to G)	6 ms (G to G)	8 ms (G to G)	8 ms (G to G)	8 ms (G to G)	8 ms (G to G)
連接埠	輸入孔	HDMI (2, HDCP 2.2/1.4), HDMI (HDCP 1.4), DP (HDCP 2.2/1.3), DVI-D (HDCP 1.4), Audio In, RS-232C In (4 Pin Phone-jack), RJ45 (LAN), IR In, USB 2.0 Type A						
	輸出孔	HDMI Out, Audio Out, External Control (RS-232C Out (4 Pin Phone-jack))						
外觀結構	邊框顏色	Black	Black	Black	Black	Black	Black	Black
	邊框寬度	14.9 mm (Even Bezel)	14.3 mm (Even Bezel)	14.9 mm (Even Bezel)	9.9 mm (T/R/L), 14.4 mm (B)	9.9 mm (T/R/L), 14.4 mm (B)	9.9 mm (T/R/L), 14.4 mm (B)	8.4 mm (T/R/L), 14.4 mm (B)
	重量 (不含支架)	66 kg	49 kg	41.5 kg	28.2 kg	19 kg	15.4 kg	11.2 kg
	重量 (含支架)	-	-	-	28.8 kg	19.6 kg	16 kg	11.8 kg
	重量 (含包裝)	99 kg	72.5 kg (With Pallet)	51.2 kg	35 kg	24.2 kg	18.8 kg	13.7 kg
	尺寸 (寬 × 高 × 深)	2,191.8 × 1,246.8 × 86.1 mm (without Handle and LG Logo)	1,926.2 × 1,097.2 × 60.6 mm (without Handle and LG Logo)	1,682.4 × 960.3 × 57.9 mm (without Handle and LG Logo)	1,453.3 × 844 × 39.9 mm (with LG Logo)	1,234.4 × 720.9 × 39.9 mm (with LG Logo)	1,098.6 × 644.5 × 39.9 mm (with LG Logo)	962.5 × 568 × 39.9 mm (with LG Logo)
	尺寸 (含支架) (寬 × 高 × 深)	-	-	-	1,453.3 × 893.1 × 290.0 mm	1,234.4 × 770.7 × 290.0 mm	1,098.6 × 694.3 × 290.0 mm	962.5 × 613.1 × 290.0 mm
	包裝尺寸 (寬 × 高 × 深)	2,342 × 1,386 × 420 mm	2,037 × 1,250 × 285 mm	1,816 × 1,126 × 228 mm	1,600 × 1,095 × 175 mm	1,360 × 835 × 175 mm	1,197 × 775 × 162 mm	1,060 × 660 × 152 mm
	把手	Yes	Yes	Yes	No	No	No	No
	VESA™標準轉接孔	800 × 400 mm	600 × 400 mm	600 × 400 mm	300 × 300 mm	300 × 300 mm	300 × 300 mm	200 × 200 mm
產品特點	Internal Memory 16 GB, Built-in Wi-Fi, Sensor (Temperature Sensor, Auto Brightness Sensor, Acceleration (Gyro) Sensor), Local Key Operation, webOS 6.0, Embedded CMS (Local Contents Scheduling, Group Manager), USB Plug & Play, Fail Over, Background Image (Booting Logo Image, No Signal Image), Sync Mode (RS-232C Sync, Local Network Sync), Multi-screen (PIP, PBP (4)), Screen Share, Video Tag (4), Play via URL, Rotation (Screen Rotation, External Input Rotation), Gapless Playback, Tile Mode Setting (Max. 15 × 15), Setting Data Cloning, SNMP, ISM Method, Auto Set ID, Status Mailing, Control Manager, 3rd Party Compatibility (Crestron Connected® ²⁾), Power (Smart Energy Saving, PM Mode, Wake on LAN, Network Ready (Except 98" / 86" / 75")), Beacon, HDMI-CEC ³⁾ , SI Server Setting, webRTC, Pro:Idiom							
使用環境	使用環境溫度	0°C to 40°C	0°C to 40°C	0°C to 40°C	0°C to 40°C	0°C to 40°C	0°C to 40°C	0°C to 40°C
	使用環境濕度	10% to 80%	10% to 80%	10% to 80%	10% to 80%	10% to 80%	10% to 80%	10% to 80%
電源	輸入電壓	AC 100-240V ~, 50/60Hz	AC 100-240V ~, 50/60 Hz	AC 100-240 V ~, 50/60Hz	AC 100-240 V ~, 50/60 Hz	AC 100-240 V ~, 50/60 Hz	AC 100-240V ~, 50/60Hz	AC 100-240V ~, 50/60Hz
	電源架構	Built-in Power	Built-in Power	Built-in Power	Built-in Power	Built-in Power	Built-in Power	Built-in Power
供率	Typ. / Max.	420 W / 570 W (TDB)	215 W / 280 W (TDB)	180 W / 260 W (TDB)	130 W / 190 W	110 W / 150 W	1000 W / 140 W	80 W / 120 W
	BTU (British Thermal Unit)	1,433 BTU/Hr (Typ.), 1,945 BTU/Hr (Max.) (TDB)	733.69 BTU/Hr (Typ.), 955.5 BTU/Hr (Max.) (TDB)	614.25 BTU/Hr (Typ.), 887.25 BTU/Hr (Max.) (TDB)	444 BTU/Hr (Typ.), 649 BTU/Hr (Max.)	376 BTU/Hr (Typ.), 512 BTU/Hr (Max.)	342 BTU/Hr (Typ.), 478 BTU/Hr (Max.)	273 BTU/Hr (Typ.), 410 BTU/Hr (Max.)
	Smart Energy Saving	294 W (TDB)	150.5 W (TDB)	126 W (TDB)	91 W	77 W	70 W	56 W
	DPM	0.5 W	0.5 W	0.5 W	0.5 W	0.5 W	0.5 W	0.5 W
	Power off	0.5 W	0.5 W	0.5 W	0.5 W	0.5 W	0.5 W	0.5 W
聲音	喇叭	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	安裝	CB / NRTL	CB / NRTL	CB / NRTL	CB / NRTL	CB / NRTL	CB / NRTL	CB / NRTL
認證	EMC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC	FCC Class "A" / CE / KC
	ErP / Energy Star	Yes (NewErP) / No (TDB)	Yes (NewErP) / No (TDB)	Yes (NewErP) / Yes (TDB)	Yes (NewErP) / Yes	Yes (NewErP) / Yes	Yes (NewErP) / Yes	Yes (NewErP) / Yes
OPS 相容性	OPS 相容類型	No	Yes	Yes	Yes	Yes	Yes	Yes
	OPS 內建電源	No	No	No	No	No	No	No
相容軟體	SuperSign CMS, SuperSign Control / Control+, SuperSign WB, SuperSign Media Editor, Promota (Not Available for EU/CIS), Mobile CMS, LG ConnectedCare ⁴⁾							
支援語言	English, French, German, Spanish, Italian, Korean, Chinese (Simplified), Chinese (Original), Portugues (Brazil), Swedish, Finnish, Norwegian, Danish, Russian, Japanese, Portugues (Europe), Dutch, Czech, Greek, Turkish, Arabic							
配件	基本配件	Remote Controller, Power Cord, QSG, Regulation Book, Phone to RS-232C Gender						
	選擇配件	-	OPS Kit (KT-OPSPF), LSW640A/B (Wall Mount)	Stand(ST-653T), Wall Bracket(LSW350B), OPS Kit(KT-OPSPF)				
特色	Overlay Touch Compatibility	No	No	No	No	No	No	No
	Tilt (Facedown)	-	-	-	Yes (Max. 30°) ⁵⁾	Yes (Max. 30°) ⁵⁾	Yes (Max. 30°) ⁵⁾	Yes (Max. 15°) ⁵⁾
	IP Rating	-	-	-	IP5X	IP5X	IP5X	IP5X

¹⁾ The luminosity ratio of Full Black / Full White color on video input condition.

²⁾ Network based control.

³⁾ Compatibility may differ by equipment.

⁴⁾ The availability can differ by region.

⁵⁾ In conditions within 30°C temperature, 50% humidity.

* 規格如有變動恕不另行通知，詳細使用方式請見使用手冊。



Download
LG C-Display+
Mobile App
Google Play Store



TEL: 0800-800-945 FAX: 02-8935-2108

E-mail: service@truesun.com.tw

總公司: 新北市淡水區民權路187巷12號23樓

台北辦公室: 台北市中山區龍江路415巷48號

LG may make changes to specifications and product descriptions without notice.
Copyright © 2022 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. The names of products and brands mentioned here may be the trademarks of their respective owners.

